

GTO[®]/ACCESS SYSTEMS


COMMERCIAL/RESIDENTIAL

Technology • Innovation • Quality
Since 1987



PHOTO BEAMS (R4222)

Primary non-contact “through beam” photo beam device.

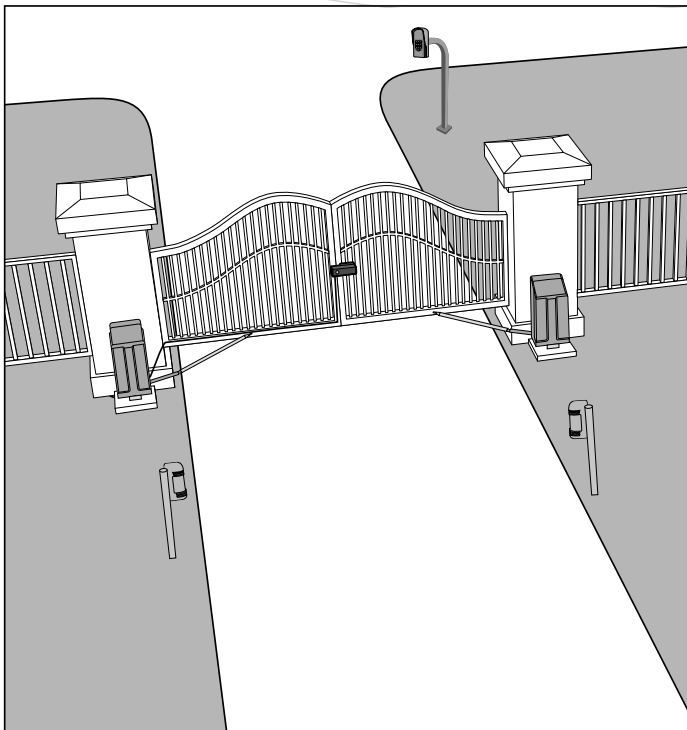

STANDARD FEATURES

- The GTO Photo Beams provide a “non-contact” means of entrapment protection. Consult your GTO/PRO Distributor and refer to the installation manual of your GTO Gate Operator system further information regarding placement and requirements of photo beams.
- Range of 30 ft. (9.1 m) between sender and receiver.
- Easy to install and works with any brand of operator.
- More reliable than retro reflective photo beam systems.
- Normally open or normally closed wiring options.
- L.E.D.'s for quick alignment and troubleshooting.
- Voltage ranges: 8 to 26 Volts DC or AC.
- Recommend 16 gauge multi-stranded wire (RB509).
- Universal mounting to any solid surface.

AVAILABLE FROM:

1-800-543-GATE (4283) • WWW.GTOACCESS.COM

GTO®, GTO/PRO®, Bulldog®, GTO Access Systems™, are trademarks of GTO, Inc. and are the exclusive property of GTO, Inc. (“GTO”). All rights are reserved by GTO, and these marks may not be used in any form without the prior written permission of GTO. © 2009